

Performance Plus EZ-Flip Uniboot Fiber Patch Cords

ALSO AVAILABLE WITH PUSH-PULL TAB

FEATURES

- Ideal for high-density applications, and comes standard with 2.0 mm round cable
- Reversible polarity feature, allowing polarity changes in the field without tools
- TIA compliant color-coded connectors and boots
- 100% tested for insertion loss, return loss
- Electronic test results available by request prior to order
- Patch cords include a limited 25-year Warranty
- Country of origin: USA

STANDARDS & REGULATIONS

- Complies with or exceed the technical specifications in ITU-T G.657.A1/A2/B2
- ANSI/TIA-568.3-D Optical Fiber Cabling and Components Standard
- ANSI/TIA-598-D Optical Fiber Cable Color Coding
- ISO/IEC 11801-1, -2, -3, -5 Information technology — Generic cabling for customer premises
- TIA/EIA-604-10 (LC: FOCIS 10)

MECHANICAL SPECIFICATIONS

Physical Specifications:



- Cable Type: 2.0 mm Duplex Round
- Fiber Count: 2
- Nominal Diameter: 0.08 inches (2.0 mm)
- Minimum Bend Radius: 10 mm

Optical Specifications:

- Insertion Loss: ≤ 0.25 dB
- Return Loss: ≥ 55 dB

DESIGN CONSIDERATIONS

- Single-mode UPC
- Multi-mode UPC
- Bend-insensitive glass (G.657.A1)

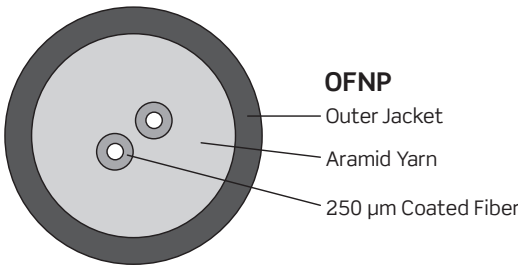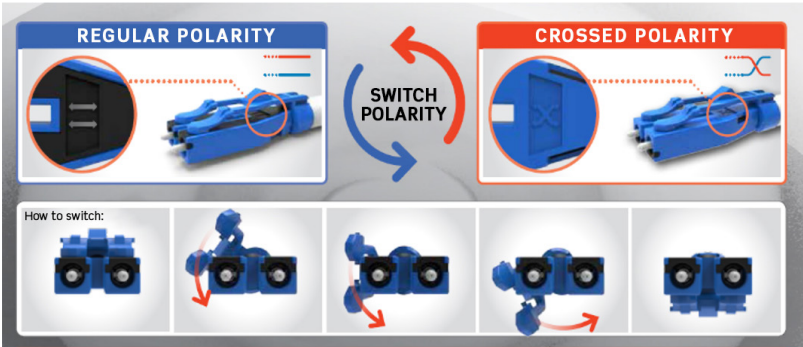

DESCRIPTION	PART NO.
Patch Cord Uniboot LC/UPC-LC/UPC OM4 Duplex Round OFNP 2.0 mm Jacket: XX=Length*	P2X54-2-5X5XT-XX*
Patch Cord Uniboot LC/UPC-LC/UPC SM G657A1 Duplex Round OFNP 2.0 mm Jacket: XX=Length*	P2X83-2-5X5XT-XX*

*XX= Customizable in Feet / Meter, length and unit of measurement must be indicated when ordering.